



GIOVENZANA

INTERNATIONAL B.V.

GIOVENZANA INTERNATIONAL B.V.

1077 XX Amsterdam, The Netherlands
WTC Strawinskylaan 1105
Phone: +31(0) 20.4413576 - Fax: +31(0) 20.4413456
E-mail: giovenzana@giovenzana.com

G.T.R. LLC

127051, Moscow, Russian Federation
Likhov lane, h.3, b.2, office 101
Phone: +7.495.6991296 / +7.499.9228548
E-mail: gtr@giovenzana.com

GIOVENZANA CONTROLS INDIA Pvt. Ltd.

Near Mindspace, Malad West - 400064 Mumbai
A-203, Knox Plaza, Chincholi, Off Link Road
Phone: +91.22.42640071
E-mail: ggindia@giovenzana.com

GIOVENZANA do Brasil

São Paulo - Brasil
Rua Enxovia, 472 cj1904
Cep. 04711-030; Vila São Francisco
Phone: +55 11 3360-6840 / 11 3530-5316
E-mail: logistic.brasil@giovenzana.com

Branch

DUBAI U.A.E. P.O. Box 262146 - J.A.F.Z.A. 15, Jebel Ali Free Zone
Phone: +971.4.8870788 - Fax: +971.4.8870787
E-mail: uae@giovenzana.com



www.giovenzana.com

AUTOMATION • LIMIT & MICRO SWITCHES

GIOVENZANA INTERNATIONAL B.V.



LIMIT SWITCHES
MICRO SWITCHES





GIOVENZANA INTERNATIONAL B.V.: AUTOMATION TECHNOLOGIES

QUALITY AS A LIFE STYLE

www.giovenzana.com



AUTOMATION

The solutions offered by **Giovenzana** are the results of the market analysis of industrial electrical accessories requirements in conformity with all relevant international standards. The range includes:

- Phoenix cam switches from 12A to 200A;
- Regolus switch disconnectors from 16A to 160A;
- Pegasus, Orion and NEMA auxiliary controls;
- Thermoplastic limit switches, with manual reset, safety limit switches, M12 & pre-wired thermoplastic limit switches;
- Foot switches and micro switches.

QUALITY

Giovenzana, leader in the elevator and lifting equipment field, has gained a prominent position in the automation sector with the launch of industrial control devices into the market. For many years, all commercial and industrial operations have been integrated within the **UNI EN ISO 9001:2015** quality system.

CSQ certificate N 9105. GIOV.

Quality system is the end users guarantee that all production stages are closely followed under strict control and adhere to the requirements set by the company both in terms of customer expectations and compliance to the relevant international standards as proved by the various certificates **Giovenzana** holds for its products.

By the **UNI EN ISO 14001:2015**, **Giovenzana** keeps up with new technologies in order to reduce raw materials consumption, energy and natural resources and to minimize waste and emissions. This reduces the environmental impact.

The certification CSQ N 9191. GIBV.

COMPLIANCE

All **Giovenzana** products are manufactured according to the most relevant Cee directives. **Giovenzana** certifies this compliance with a declaration of conformity.

CERTIFICATIONS

In order to reach its high quality level **Giovenzana's** products are tested by multiple third parties. In order to obtain the UL mark, **Giovenzana** submits their products to Underwriter Laboratories Inc., one of the most eminent independent certification companies in the World.

CEE DIRECTIVES

From January 1st, 1997 it is compulsory to CE mark all electromechanical products; this has been outlined by an important regulation: 2006/95/CE Low Voltage Directives.

CE MARK

European directives, applied to all national regulations, set the minimum requirements in term of safety of all electrical material sold within the EU.

Compliance to these requirements is certified by the manufacturer by the CE mark placed on the products.


STANDARDS

Giovenzana's products comply with both the European EN and the American UL standards. These regulations, such as CEI EN 60204-1 (CEI 44-5) with regards to the safety requirements of the electrical circuits on board industrial machinery, define the characteristics, performance and use of the products.

EN EUROPEAN STANDARDS

The EN European standards are originated from IEC International standards and are the result of the collaboration between CENELEC (European Committee for Electrotechnical Standardization) member countries.

These standards cover and eliminate existing national standards that may be contradictory and non-compliant.



PRODUCTS INDEX - LIMIT SWITCHES & MICRO SWITCHES

A FTN SERIES THERMOPLASTIC LIMIT SWITCHES pg. 7 / 26



B FTN1R SERIES LIMIT SWITCHES WITH MANUAL RESET pg. 27 / 41



PRODUCTS INDEX - LIMIT SWITCHES & MICRO SWITCHES

C FTNG SERIES 40 MM THERMOPLASTIC LIMIT SWITCHES pg. 43 / 53




FTNG131




FTNG134




FTNG138




FTNG139



FTNG140



FTNG141



FTNG172

D STNK SERIES SAFETY LIMIT SWITCHES WITH KEY pg. 55 / 62



STNK01



STNK02



STNK03

E FCT SERIES M12 CONNECTION & PRE-WIRED THERMOPLASTIC LIMIT SWITCHES - IP67 pg. 63 / 73



01



02



03



04



05



06



07



08



09



10



11

AVAILABLE VERSIONS



FCT2L...
with side cable input



FCT2V...
with vertical cable input



FCTML...
with side connector input



FCTMV...
with vertical connector input

F MFI SERIES MICRO SWITCHES pg. 75 / 91



MFI



MFI.5



MFI.ST



MFI.STP



MFI.T



GIOVENZANA

INTERNATIONAL B.V.



**40 MM THERMOPLASTIC LIMIT SWITCHES
FTNG SERIES**

C FTNG SERIES 40 MM THERMOPLASTIC LIMIT SWITCHES



DESCRIPTION

The **FTNG series** 40 mm thermoplastic limit switches, conform to EN 50047, have been developed to provide a range of options including a various choice of snap acting and slow acting and a wide range of actuator heads.
The **FTNG series** offers the option of rotating the head in 90° increments before installation to allow ease of mounting.
The dimensions of this line comply with the indications of EN 50041.

Giovenzana limit switches can be used in various applications in automation, lift and handling system fields.
The **FTNG series** is particularly suitable for heavy applications, thanks to its solidity and reliability.
Operations of these limit switches is achieved by the sliding action of the guard or other moving objects should not pass completely over the switch and allow the plunger or lever to return to its original position.

TECHNICAL DATA - HOUSING

Made of glass- reinforced polymer, self-extinguishing, shock-proof thermoplastic resin and with double insulation	
FTNG Series one threaded conduit entry	Standard: M20
Protection degree	IP67 according to EN60529 with cable gland having equal or higher protection degree

GENERAL DATA

Positive opening operation	NC contact
Utilization category	AC15, A600, B600, A300 (for contact block type)
Minimum admissible current	5V, 5mA, DC
Insulation resistance	100MΩ min (DC 500V)
Contact resistance	25mΩ max (Initial)
Max switching speed	250 mm/s
Max switching frequency	6000 operation per hour
Enclosure material	UL approved glass-filled polybutylene terephthalate
Roller Material	Metal, PA, rubber
Operating temperature	Min -25°C (-18°F) / Max 80°C (+176°F)
Mechanical life expectancy	1x10 ⁷ cycles min
Electrically life expectancy	150.000 cycles min
Vibration resistance	IEC 68-2-6, 10-55Hz ± 1Hz, Excursion: 0.35mm, 1 octave/min
Conduit entry	Various
Fixing	2xM4

ELECTRICAL DATA

Rated thermal current (Ith)	10A
Rated insulation voltage (Ui)	600V AC
Rated impulse withstand voltage (Uimp)	2500V AC
Pollution degree	3
Protection against electric shock	Class II (Double insulation)

STANDARDS & APPROVALS

Standards	EN60947-5-1, EN50047, EN1088
Approvals	cULus, EAC and CCC for all applicable directives

QUALITY MARKS



MAIN FEATURES

- Conforms to EN (TUV) standards corresponding to the CE marking.
- Positive opening operation of NC (Normally Closed) contacts conforming to IEC/EN 60947-5-1.
- Double insulation makes ground terminal unnecessary.
- Wide standard operating temperature range: -25°C to 80°C.
- Full range of actuator heads and levers suitable for safety applications.
- Sealing up to IP67.
- Wide switch variations (Snap action and slow action basic switches).

ACCORDING TO STANDARDS

- EN81.20** Safety contacts according to EN60947-5-1.
- EN81.50** Protection degree higher than IP4x. Mechanical endurance higher than 1x10⁶ cycles.

INSTALLATION FOR SAFETY APPLICATIONS

Use only switches marked with the symbol . Always connect the safety circuit to the **NC contact** (normally closed contacts: 11-12 / 21-22 / 31-32) as required by **EN ISO 14119 paragraph 5.4** and as stated in the standard **EN81.20 paragraph 5.11.2.2.1**.



TAKE CARE!

If not expressly indicated in this chapter, for the correct installation and utilization of all articles see the instructions given on pages 92-93.

DATA TYPE APPROVED BY UL

Utilization categories:

FTNG SERIES	Q300	A600	1 NC/1 NO Slow Action 2 NC Slow Action
		B600	1 NC/1 NO Snap Action
		A300	2 NC/1 NO Slow Action (3 poles) 3 NC Slow Action (3 poles)

Data of the housing type 1.
For all contact blocks use 60 or 75°C copper (Cu) conductor and wire size No. 14 - 18 AWG.
Terminal tightening torque of 7.1 lb in (0.8 Nm).
In conformity with standard: UL508, CSA 22.2 No. 14 - 10.

Please contact our technical service for the list of approved products.



PROTECTION CLASS

IP67 Designed to be used even in the most severe environmental situations, these devices pass the immersion test IP67 in conformity with EN 60529.


DOUBLE INSULATION

Materials of group II, according to IEC 536, are made with double insulation. This consists of doubling the insulation capability by means of an additional divider in order to eliminate any electrical shock risk and avoid the need for any additional protections.

POSITIVE OPENING


A limit switch complies to the specification when all the normally closed contact elements of the switch can be changed, with certainty, to the open position (no flexible link between the moving contacts and the operator of the switch, to which an actuating force is applied). Positive opening doesn't apply to NO contacts. Control switches with positive opening operation can be equipped with either slow-break or snap action contacts. In order to use different contacts on the same switch, it is necessary to electrically separate them; otherwise only one contact can be used. Every positive opening control switch must be marked on the external housing with the symbol on the left.

OVERTURNING LEVERS




It's possible to fasten the lever on switches on straight or reverse side, maintaining the positive coupling. In this way it is possible to obtain two different work plans of the lever.

ADJUSTABLE LEVERS

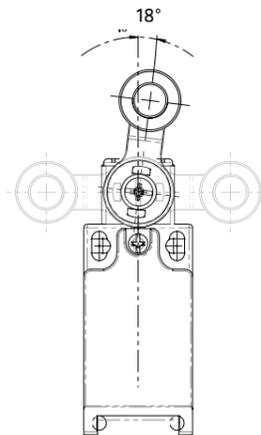


In switches with revolving lever it is possible to adjust the lever with 18° steps for the whole 360° range. The positive movement transmission is always guaranteed thanks to the particular geometrical coupling between the lever and the revolving shaft.

RUBBER ROLLERS

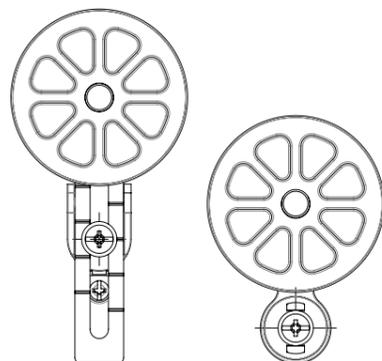

Different actuators with rubber rollers are available. The customer can choose the most suitable product depending on his needs. For example the lift speed in order to reduce the noise inside the cabin.


ROTATING HEADS

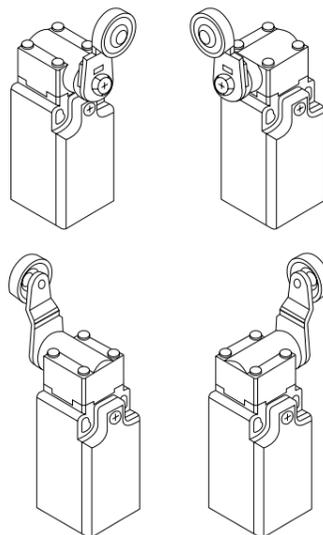

In all switches, it is possible to rotate the head in 90° steps.

CONTACT BLOCK FORM

Contact Types	X11	W02	Z11	W12	W03
Contact Form	1NC/1NO Slow Action	2NC Slow Action	1NC/1NO Snap Action	2NC/1NO Slow Action	3NC Slow Action

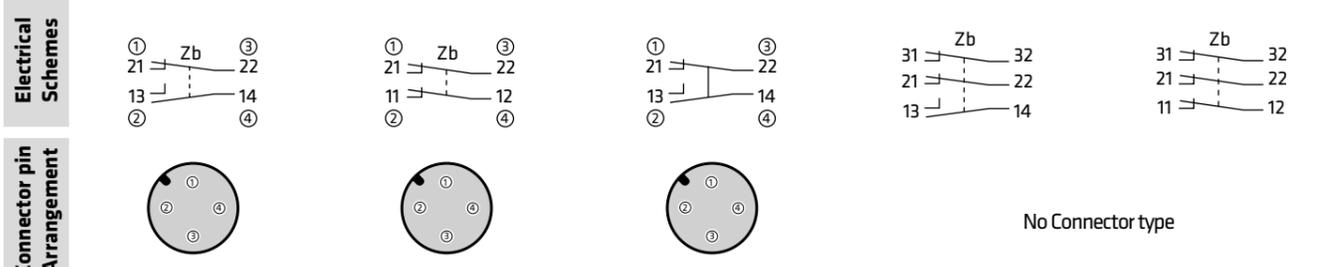

M12 Connector pin arrangement - on request

STRUCTURE DESCRIPTION

Metal Lever Setting


Grooves which engage the lever every 18° are cut in the operation indicator disk to prevent the lever from slipping against the rotary shaft.

Contact block

Snap Action: 1NC/NO
Slow Action: 1NC/NO, 2NC, 2NC/1NO, 3NC.

Cover

The cover, with a hinge on its lower part, can be opened by removing the screw of the cover, which ensures ease of maintenance and wiring.

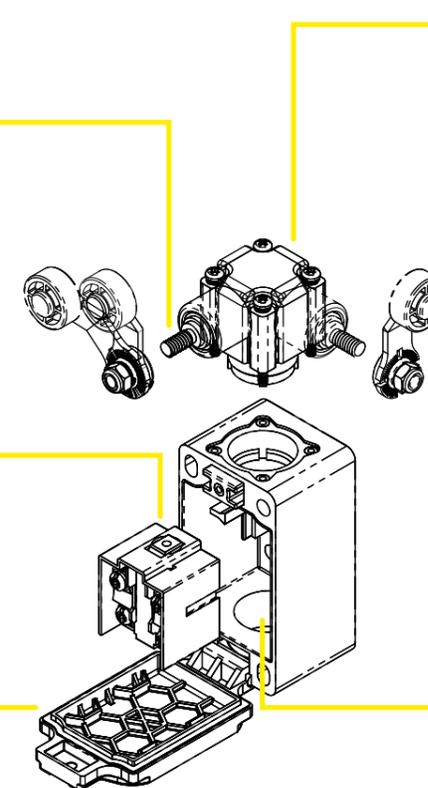

Head

With roller lever models, the direction of the switch head can be adjusted to any of the four directions by loosening the roller lever switch screws at the four corners of the head.



Conduit Entry

Standard: M20.
On request: 1/2NPT, PG13.5.

PRODUCT SELECTION

FTNG	1	31	X11	M
Series	Function	Head and actuators	Contact Types	Thread dimension of lead exit
	1 - Without Reset Function	31 - Plain steel plunger 34 - Steel roller plunger 38 - ø22 Roller lever 39 - Adjustable ø22 roller lever 40 - Adjustable ø50 roller lever 41 - ø50 Rubber roller lever 72 - Adjustable PA rod lever	X11 - 1NC/1NO Slow Action W02 - 2NC Slow Action Z11 - 1NC/1NO Snap Action W12 - 2NC/1NO Slow Action W03 - 3NC Slow Action	Standard: BLANK - M20 On request: N - 1/2NPT G3 - PG13.5 C - Connector
			Slow Action & Snap Action: Type "Zb"	

SELECTION DIAGRAM

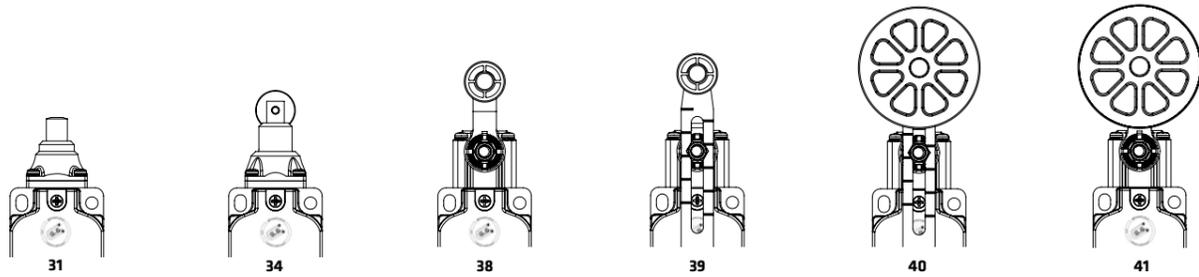

ACTUATORS

FTNG SERIES



CONTACT BLOCKS

CONDUIT ENTRY

- X11** - 1NC/1NO Slow Action
- W02** - 2NC Slow Action
- Z11** - 1NC/1NO Snap Action
- W12** - 2NC/1NO Slow Action
- W03** - 3NC Slow Action

Threaded conduit entry

- Standard: **BLANK** - M20
- On request: **N** - 1/2NPT
- G3** - PG13.5
- C** - Connector



Wiring

Customized wirings are available on request, with connectors and cables in accordance with customers' specifications.

FTNG131: Plain steel plunger

FTNG	1	31	X11	-
Series	Function	Head and actuators	Contact Types	Thread dimension of lead exit
	1 - Without Reset Function	31 - Plain steel plunger	X11 - 1NC/1NO Slow Action W02 - 2NC Slow Action Z11 - 1NC/1NO Snap Action W12 - 2NC/1NO Slow Action W03 - 3NC Slow Action	Standard: BLANK - M20 On request: N - 1/2NPT G3 - PG13.5 C - Connector
Slow Action & Snap Action: Type "Zb"				



OPERATION DIAGRAMS

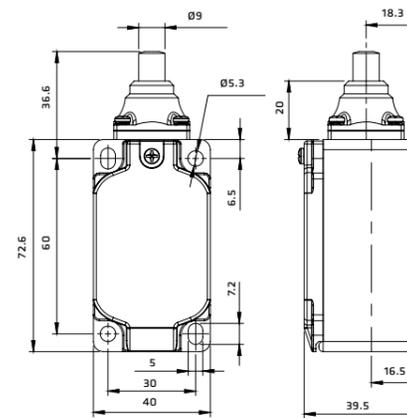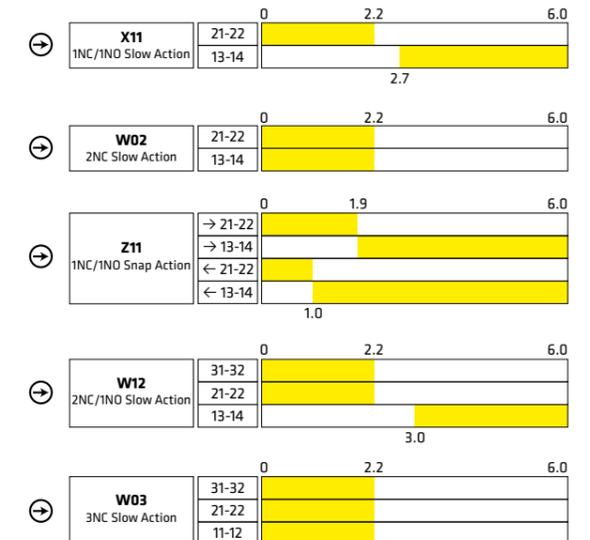

FTNG134: Steel roller plunger


FTNG	1	34	X11	-
Series	Function	Head and actuators	Contact Types	Thread dimension of lead exit
	1 - Without Reset Function	34 - Steel roller plunger	X11 - 1NC/1NO Slow Action W02 - 2NC Slow Action Z11 - 1NC/1NO Snap Action W12 - 2NC/1NO Slow Action W03 - 3NC Slow Action	Standard: BLANK - M20 On request: N - 1/2NPT G3 - PG13.5 C - Connector
Slow Action & Snap Action: Type "Zb"				

OPERATION DIAGRAMS

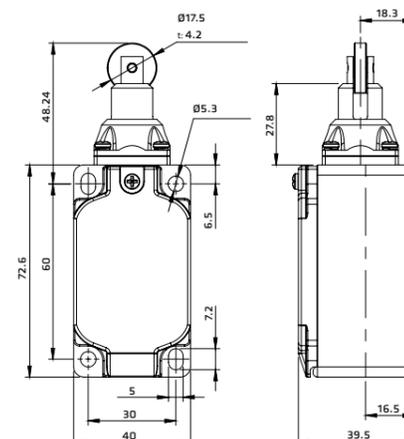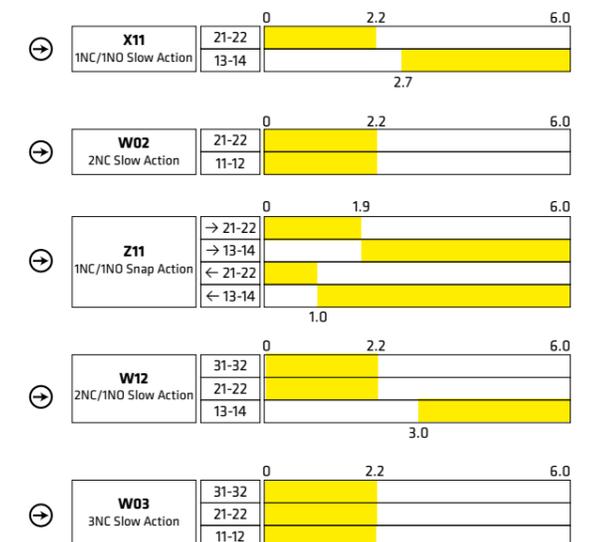


FTNG138: Ø22 Roller lever

FTNG	1	38	X11	-
Series	Function	Head and actuators	Contact Types	Thread dimension of lead exit
	1 - Without Reset Function	38 - Ø22 Roller lever	X11 - 1NC/1NO Slow Action W02 - 2NC Slow Action Z11 - 1NC/1NO Snap Action W12 - 2NC/1NO Slow Action W03 - 3NC Slow Action Slow Action & Snap Action: Type "Zb"	Standard: BLANK - M20 On request: N - 1/2NPT G3 - PG13.5 C - Connector

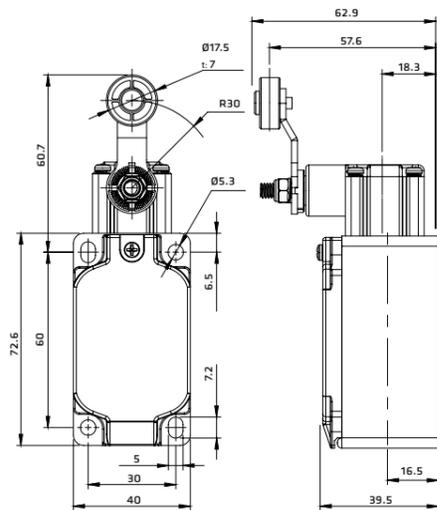


OPERATION DIAGRAMS

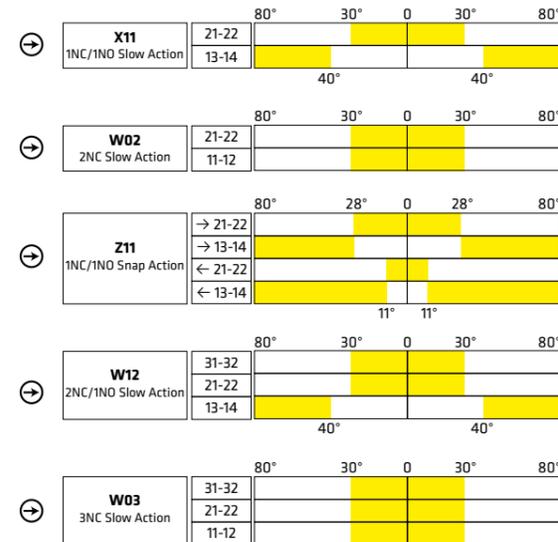


FTNG139: Adjustable Ø22 roller lever

FTNG	1	39	X11	-
Series	Function	Head and actuators	Contact Types	Thread dimension of lead exit
	1 - Without Reset Function	39 - Adjustable Ø22 roller lever	X11 - 1NC/1NO Slow Action W02 - 2NC Slow Action Z11 - 1NC/1NO Snap Action W12 - 2NC/1NO Slow Action W03 - 3NC Slow Action Slow Action & Snap Action: Type "Zb"	Standard: BLANK - M20 On request: N - 1/2NPT G3 - PG13.5 C - Connector

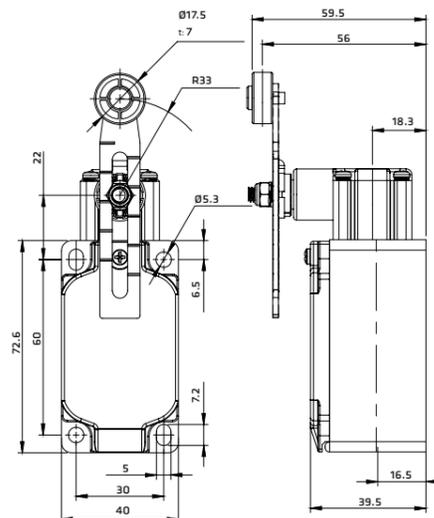


OPERATION DIAGRAMS

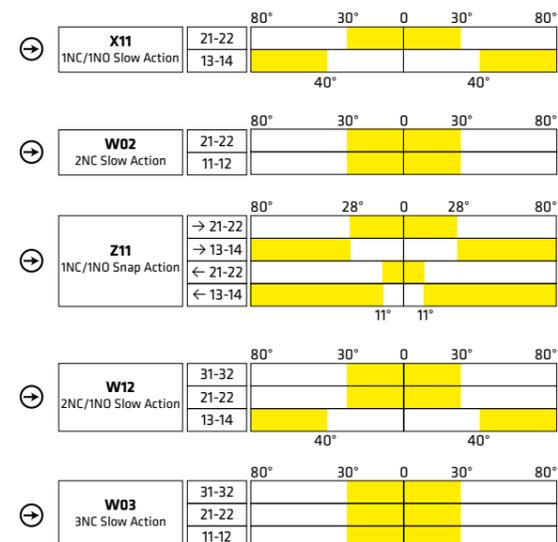


FTNG140: Adjustable Ø50 rubber roller lever

FTNG	1	40	X11	-
Series	Function	Head and actuators	Contact Types	Thread dimension of lead exit
	1 - Without Reset Function	40 - Adjustable Ø50 rubber roller lever	X11 - 1NC/1NO Slow Action W02 - 2NC Slow Action Z11 - 1NC/1NO Snap Action W12 - 2NC/1NO Slow Action W03 - 3NC Slow Action Slow Action & Snap Action: Type "Zb"	Standard: BLANK - M20 On request: N - 1/2NPT G3 - PG13.5 C - Connector

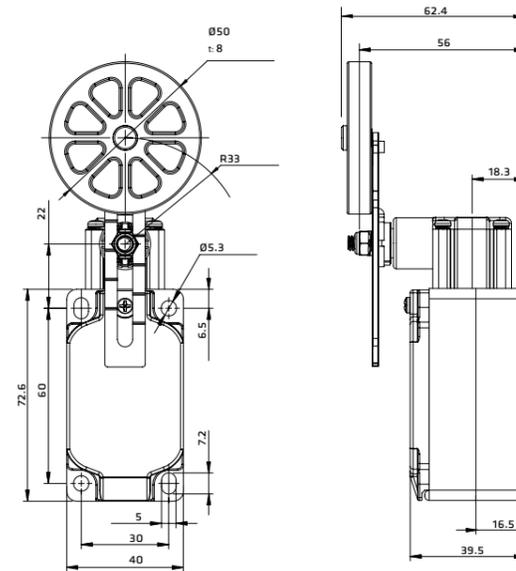


OPERATION DIAGRAMS

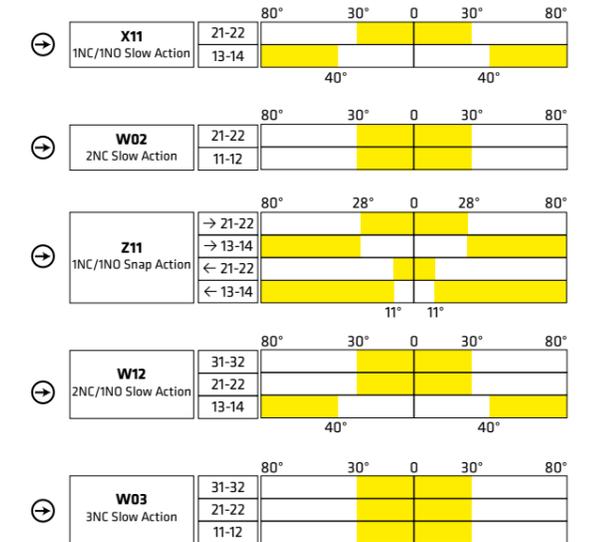


FTNG141: Ø50 Rubber roller lever

FTNG	1	41	X11	-
Series	Function	Head and actuators	Contact Types	Thread dimension of lead exit
	1 - Without Reset Function	41 - Ø50 Rubber roller lever	X11 - 1NC/1NO Slow Action W02 - 2NC Slow Action Z11 - 1NC/1NO Snap Action W12 - 2NC/1NO Slow Action W03 - 3NC Slow Action Slow Action & Snap Action: Type "Zb"	Standard: BLANK - M20 On request: N - 1/2NPT G3 - PG13.5 C - Connector

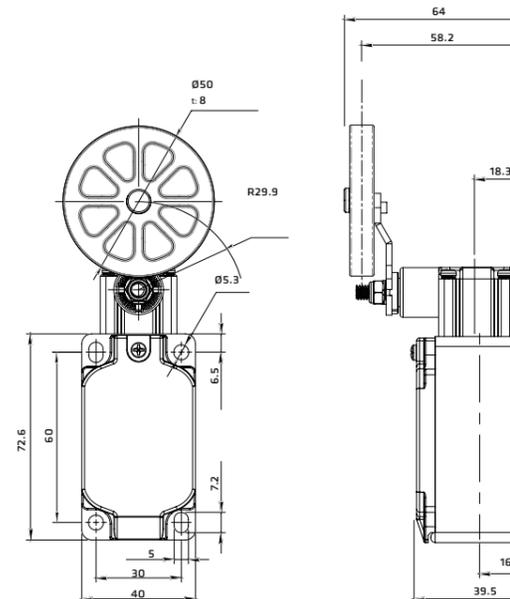


OPERATION DIAGRAMS

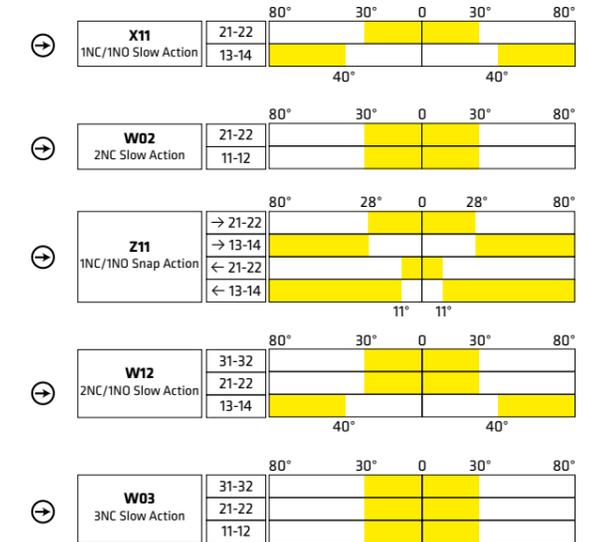


FTNG172: Adjustable PA rod lever

FTNG	1	72	X11	M
Series	Function	Head and actuators	Contact Types	Thread dimension of lead exit
	1 - Without Reset Function	72 - Adjustable PA rod lever	X11 - 1NC/1NO Slow Action W02 - 2NC Slow Action Z11 - 1NC/1NO Snap Action W12 - 2NC/1NO Slow Action W03 - 3NC Slow Action Slow Action & Snap Action: Type "Zb"	Standard: BLANK - M20 On request: N - 1/2NPT G3 - PG13.5 C - Connector

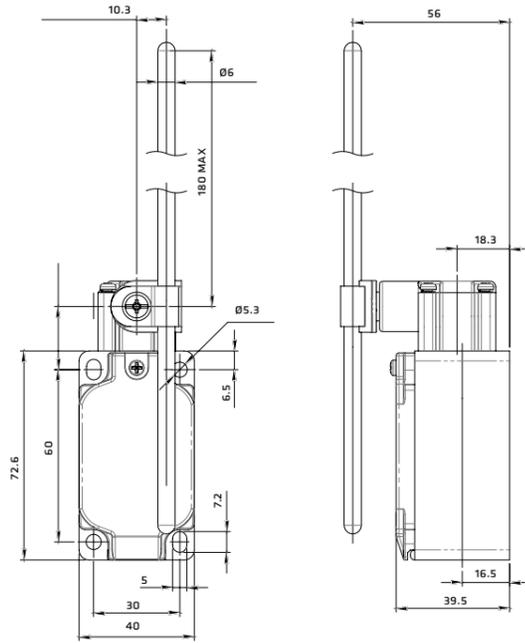

OPERATION DIAGRAMS

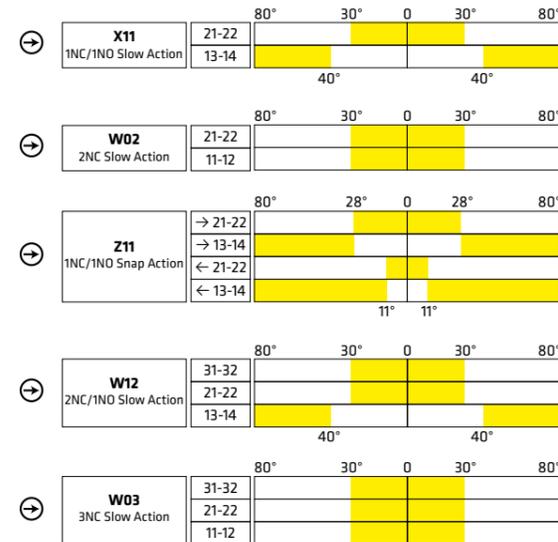

OPERATING FORCE FTNG SERIES

TYPE	CONTACT BLOCK	OPERATING TRAVEL		OPERATING FORCE	POSITIVE OPENING		TOTAL TRAVEL	
		PT	PT2nd	OF	Travel	Force		
FTNG131	X11	1 NC/1 NO Slow Action	2.2 mm	3.0 mm	7.26 N	3.2 mm	19.0 N	6.0 mm
	W02	2 NC Slow Action	2.2 mm	-	7.42 N			
	Z11	1 NC/1 NO Snap Action	1.9 mm	-	6.71 N			
	W12	2 NC/1 NO Slow Action	2.2 mm	3.0 mm	7.26 N			
FTNG134	W03	3 NC Slow Action	2.2 mm	-	7.42 N	3.2 mm	19.0 N	6.0 mm
	X11	1 NC/1 NO Slow Action	2.2 mm	3.0 mm	7.26 N			
	W02	2 NC Slow Action	2.2 mm	-	7.42 N			
	Z11	1 NC/1 NO Snap Action	1.9 mm	-	6.71 N			
FTNG138	W12	2 NC/1 NO Slow Action	2.2 mm	3.0 mm	7.26 N	45°	19.0 N	80°
	W03	3 NC Slow Action	2.2 mm	-	7.42 N			
	X11	1 NC/1 NO Slow Action	30°	41°	6.5 N			
	W02	2 NC Slow Action	30°	-	6.5 N			
FTNG139	Z11	1 NC/1 NO Snap Action	28°	-	5.3 N	45°	19.0 N	80°
	W12	2 NC/1 NO Slow Action	30°	41°	6.5 N			
	W03	3 NC Slow Action	30°	-	6.5 N			
	X11	1 NC/1 NO Slow Action	30°	41°	6.5 N			
FTNG140	W02	2 NC Slow Action	30°	-	6.5 N	45°	19.0 N	80°
	Z11	1 NC/1 NO Snap Action	28°	41°	4.5 N			
	W12	2 NC/1 NO Slow Action	30°	-	5.2 N			
	W03	3 NC Slow Action	30°	-	5.2 N			
FTNG141	X11	1 NC/1 NO Slow Action	30°	41°	6.5 N	45°	19.0 N	80°
	W02	2 NC Slow Action	30°	-	6.5 N			
	Z11	1 NC/1 NO Snap Action	35°	-	5.3 N			
	W12	2 NC/1 NO Slow Action	30°	41°	6.5 N			
FTNG172	W03	3 NC Slow Action	30°	-	6.5 N	45°	19.0 N	80°
	X11	1 NC/1 NO Slow Action	30°	41°	1.8 N			
	W02	2 NC Slow Action	30°	-	1.8 N			
	Z11	1 NC/1 NO Snap Action	28°	-	1.9 N			
FTNG172	W12	2 NC/1 NO Slow Action	30°	41°	1.8 N	45°	19.0 N	80°
	W03	3 NC Slow Action	30°	-	1.8 N			

