
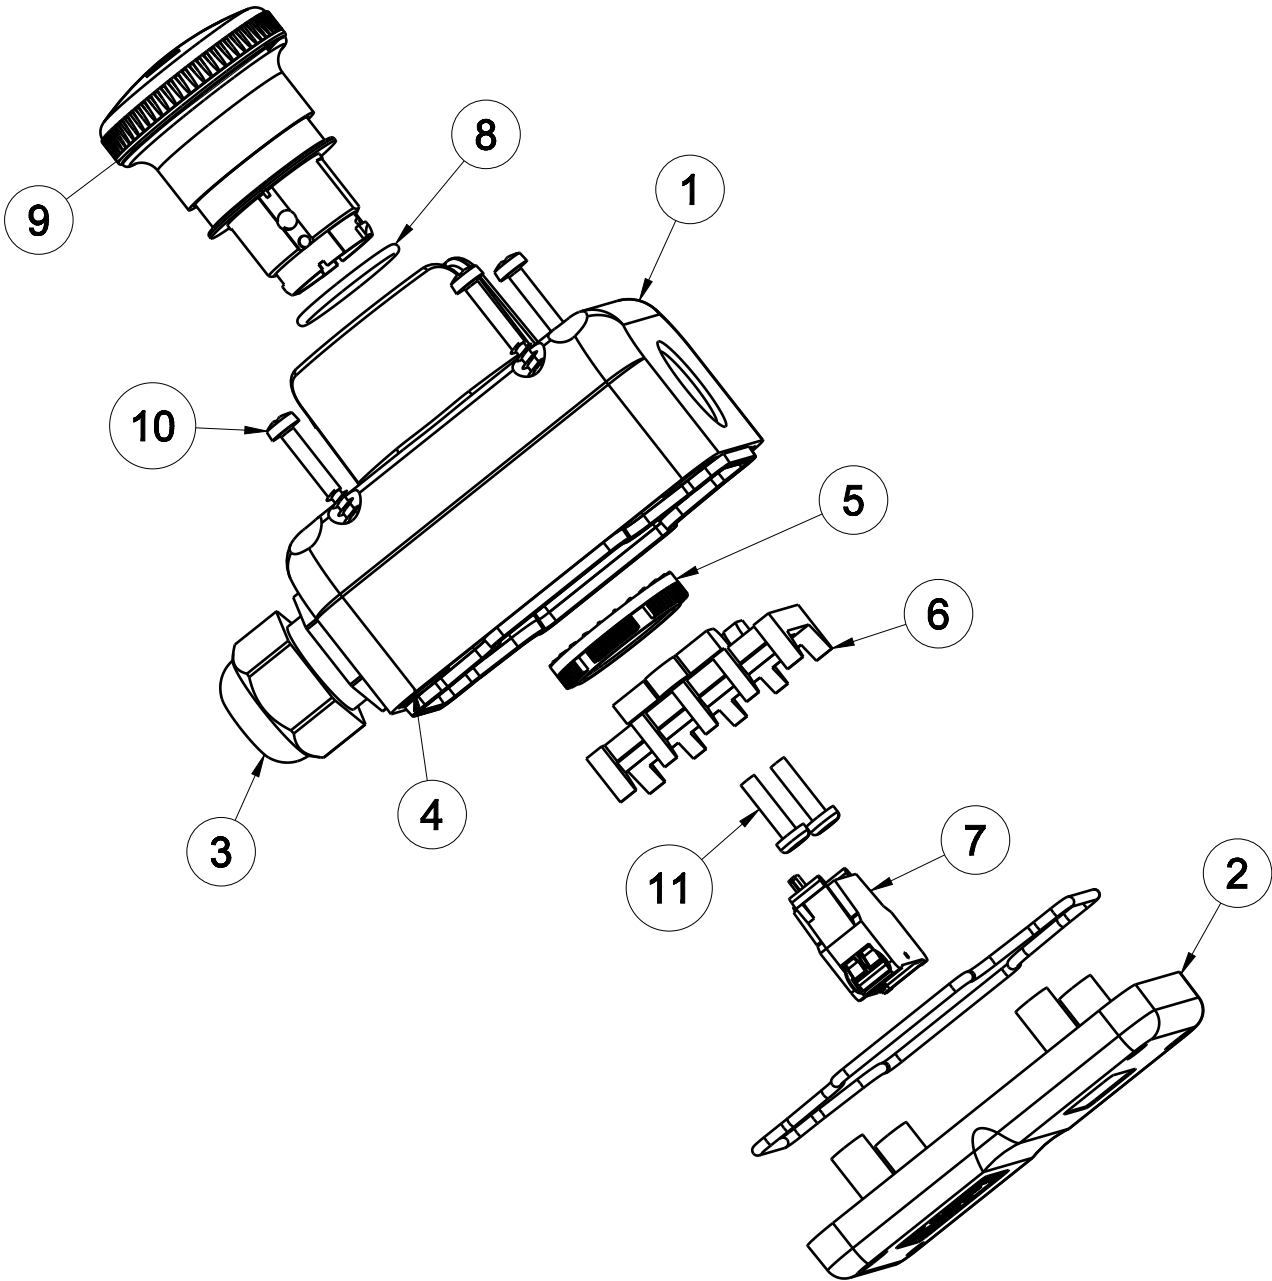


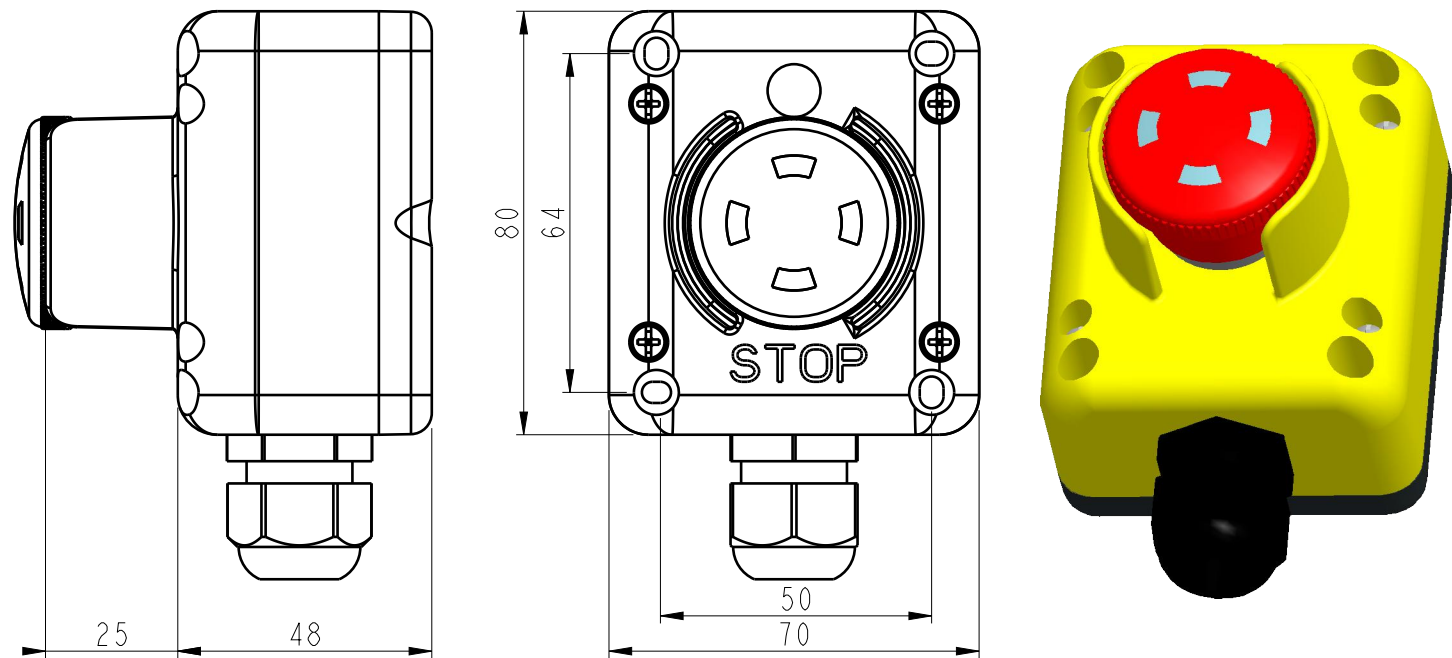

TECHNICAL CHARACTERISTIC

PCW01	1th 16A - Ui 690V	
UTILIZATION	AC15 - DC13	IEC 947-5-1 - UL508
TLP	IP65	IEC/EN60529
OPERATING TEMPERATURE	-25°C +70°C (-20F +170F)	
MECHANICAL LIFE	1 MILION OPERATIONS	
SIZE OF WIRING	Use wire ranges No.20 AWG, stranded or solid Use (min.) 0.52 mmq to 2x1.5 mmq (max.) stranded or solid	

COMPONENTS

SCREW TC 3.2x13	11606040		2	11
SCREW 4x30	11606022		4	10
MUSHROOM BUTTON	PPFN1P4SH	CSA N° 1260685 RINA N° ELE404509CS	1	9
O-RING 2081	11902034		1	8
CONTACT BLOCK NC	PCW01	UL N° NKCR7.E305585 IMQ N° CA02.02001 IMQ CB N° IT-12336 CSA N° 1260685 GOST N° B00685	1	7
COUPLING PLATE	11705102		1	6
THREADED RING	11705100		1	5
NUT	12901036		1	4
CABLE GLAND	12901035		1	3
BOX	11711039		1	2
COVER	11711036		1	1

DESCRIPTION	ARTICLE	FILES CERTICATIONS	QUANTITY	POS.
01	24/04/07 RIVA M	AGGIUNTO ORING SOSTITUITE LE VITI	Visivo Visual	I 25
02	08/11/2017CACCIA C	IL COPERCHIO ERA 11711036	Quota critica Critique Dimension	II 1
--	--	--	Altre quote Other Dimensions	I 25

GIOVENZANA INTERNATIONAL B.V.
Strawinskylaan 1105
1077 XX Amsterdam - NL

FINITURA / FINISH
--
MATERIALE / MATERIAL
--

DENOMINAZIONE / DESCRIPTION		SCALA/SCALE	DATA/DATE
PULSANTIERA 1 FUNGO VISION PUSH PULL		1000	04/04/07
DIS. / DESIGNER		Esecutivo	
DIM. INGOMBRO L x H x P		PESO / WEIGHT (g)	STAMPO / MOULD N°
[.1] x [.1] x [.1]		0.000	--
FIGURE N°/CAVITY N°		AVANZAMENTO/STATUS	APPROV. / APPROVED
0		Esecutivo	
Tolleranza		DISEGNO / DRAWING N°	
Tolerance		TLPI.VPP	
Dimensioni Nominali / Nominal Dimensions		REVISION	
±0,05 ±0,1 ±0,2 ±0,5 ±0,8 ±1,2 ±2,0 ±3,0		01	