

CHARACTERISTICS


PRETRAVEL	——	1.3 MAX
OVERTRAVEL	——	0.3 MIN
MOVEMENT DIFF	——	0.30-0.75
OPERATING FORCE	——	0.8/2.3N (82/235g)
RELEASE FORCE	——	0.5N MIN (51g)
<u>ELECTRICAL RATING</u>		
250 Vac	6A RESISTIVE	- 100 000 CYCLES @ 20°C ±5°C
250 Vac	10A RESISTIVE	- 50 000 CYCLES @ 70°C
28 Vdc	5A RESISTIVE	
28 Vdc	2.75A INDUCTIVE (L/R 0.026)	
<u>CONTACT ARRANGEMENT</u> - SPDT-DB FORM Z.		
<u>AMBIENT TEMPERATURE</u> - RANGE -55°C TO +135°C.		

NOTES:-

1. THERMOPLASTIC SNAP-TOGETHER CASE & COVER.
2. SWITCH MARKING ON THIS SIDE TO BE PART NUMBER FOLLOWED BY 4 DIGIT DATE CODE. (SEE CODING DETAILS).

16-4044 YYWW

CODING DETAILS ON SWITCH

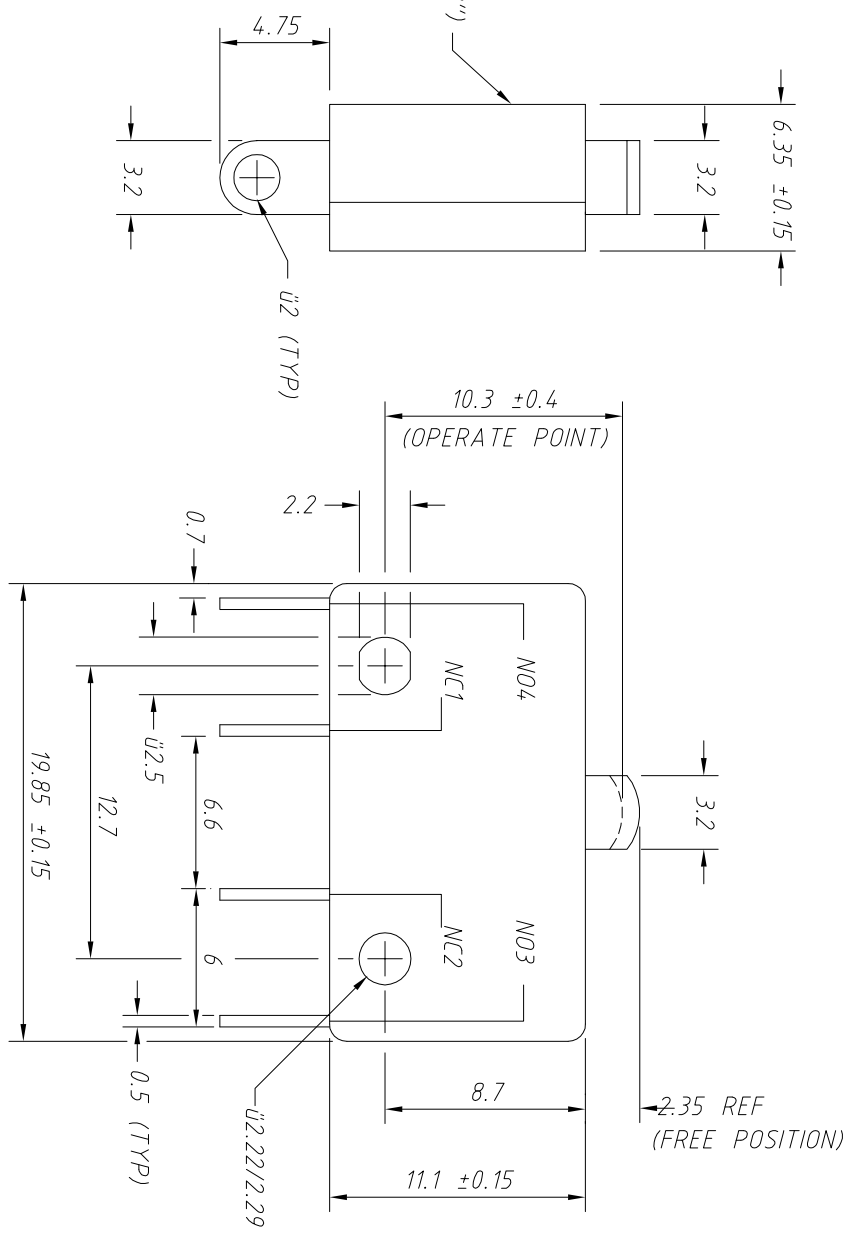

ITTW Switches

Licon Switches, Chicago Switch, RC/JUD Switches
 © 1993
 The Copyright in this drawing and in the article shown belongs to ITW Switches and no reproduction in whole or in part of the drawing or the articles shown may be made without prior written permission.

ISS.	CHANGE NOTE No.	DATE	APPR.	ISS.	CHANGE NOTE No.	DATE	APPR.
G	ECN 85474	3.3.93	MD				
H	ECN 85663	6.1.94	MD				

FINISH				MATERIAL & SPEC.			
HEAT TREAT							
DRAWN	CHKD	APPR.	SCALE	DATE	TITLE	DRAWING No.	ISS.
MD	SB	SB	4:1	4.3.93	SUB-MINIATURE SWITCH	16-4044	H

A3