Series 16 Actuators

SEE PAGE 61 / 63 FOR SWITCHS



KEY FEATURES:

- Roller Lever
- Lever
- Short Roller Lever
- Bushing Mount

MECHANICAL CHARACTERISTICS:


Part Number	Switch Series	Oper. Force	Release Force	Pretravel	Overtravel	Movement Diff.
76-1200 Roller Lever	16	4 oz max	1 oz min	.125 max	.025 min	.045 ± .011
76-1210 Lever	16	2.5 oz max	1 oz min	.125 max	.025 min	.047 ± .013
76-1220 Short Roller Lever	16	5 + 3 oz - 2 oz min	2 oz min	.050 max	.023 min	.020 ± .005
76-22604 Bushing Mount	16	5 oz	—	.050 max	.156 min	—

Notes: (1) Characteristics may vary depending on type of basic switch used in assembly. (2) All actuators supplied with mounting hardware.


STANDARDS / AGENCY / RATINGS:

PRODUCT DRAWINGS


76-1200

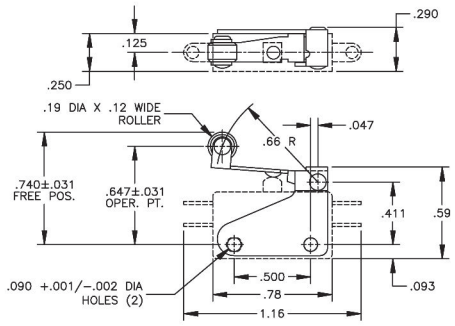


76-1210

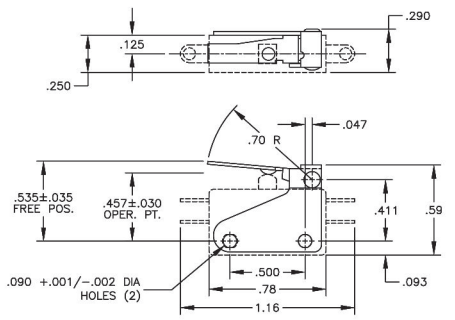

76-1220

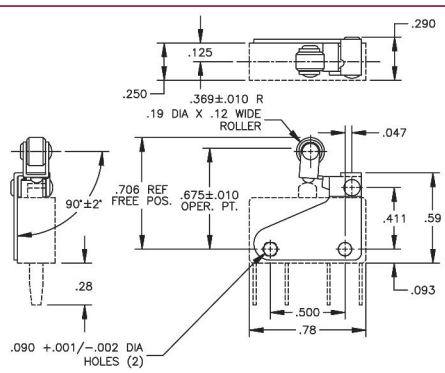

76-22604

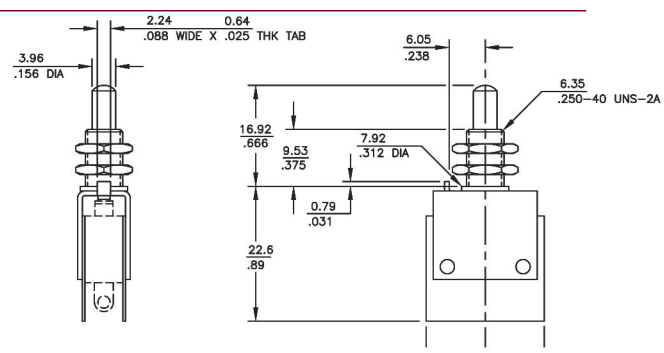

ELECTRICAL CHARACTERISTICS:

Circuit:
SPDT-DB (Form Z)

Temperature Index:
-54°C to +135°C
(-65°F to +275°F)

MIL-PRF-8805/7 QPL listed:
16-188051 MS25476-1
16-488051 MS27217-1

Electrical Rating @ 28VDC:

		Sea Level	70,000 Feet
Form Z 2 Circuit	Res	10A	10A
	Ind*	5A	2A
	Lamp	3A	—

*L/R = .026

Copyright © 2011 ITW Switches 2011

Designs and specifications are subject to change without notice due to product improvement.

ITW Switches
SENSORS, SWITCHES, ELECTRONIC CONTROLS

800.544.3354